


DELHI Pop-Ups, Tripods & Accessories

Masting, Wall Mounts & Accessories

Delhi Pre-Galvanized" Masting

- Induction welded, galvanized coating.
- Two gauges available.
- High strength steel.
- Precision locking swaged ends.

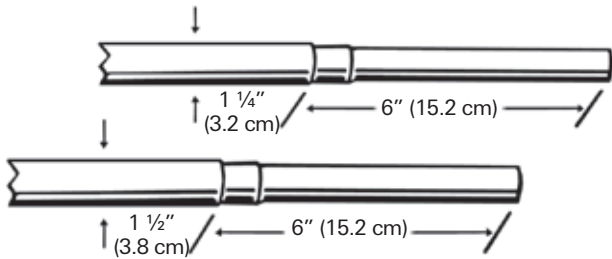

1.25/18g/5's

5' (1.52 m), 3.2 lbs (1.45 kg)

1.25/18g/10's

10' (3.05 m), 6.4 lbs (2.9 kg)

1.25/16g/5's

5' (1.52 m), 4 lbs (1.81 kg)

1.25/16g/10's

10' (3.05 m), 8 lbs (4.45 kg)

1.5/16g/10's

10' (3.05 m), 9.4 lbs (4.27 kg)

1.5/18g/10's

10' (3.05 m), 7.2 lbs (3.27 kg)

1.66/14g/3's

3' (0.91 m), 4.3 lbs (1.95 kg)

1.66/14g/8'w

8' (2.44 m), 11.3 lbs (5.2 kg)

With weldment for anti-twist ground installation.

DM Mast 1.5/16g/8', 7.5 lbs (3.4 kg)

Custom masting also available



BTA

BTA-L

- Universal wall mount..

BTA Base: 5" by 7"
Pipe: 23" length by
1 5/8" diameter

BTA-L Base: 5" by 7"
Pipe: 29" length by
1 5/8" diameter




UBS

- U-bolt and saddle.



2157

- Adjustable 5" or 7" wall mount (set of 2).
- Accepts up to 1 3/4" mast



UB-225

- U-bolts with nuts,
- 1/4" (6.4 mm).
- 20 x 2" (5.08 cm).



UBA-225* (S)

- Antenna U-Bolt assembly for round boom.
- (S) square boom.



2118

- 18" wall mount (set of 2).
- Accepts up to 1 3/4" mast. 18" off wall.



2124

- 24" Wall Mount (Set of 2)
- Accepts up to 2" mast. 24" off wall.



2402

- (3/8" diameter)
- Ground Rod 4' (1.22 m)

WADE ANTENNA'S ONGOING POLICY OF CONTINUING DEVELOPMENT MAY RESULT IN SPECIFICATION CHANGES TO ITS PRODUCTS

CAUTION NOTICE

Please read carefully

Our published installation guidelines are for standard towers and mounting devices as specified. These guidelines are based on assumed soil conditions (190 KPA or 4000 PSF) that may or may not exist in your area and on the assumption that no damage has occurred, or modifications are made to the tower or mounting device.

A qualified structural engineer should be consulted prior to installing any tower or supporting structure.



WARNING!

Survey your installation site **NOW** to prevent your antenna or support from coming in contact with overhead powerlines. Caution should be used when climbing towers and support structures.

FAILURE TO EXERCISE CAUTION MAY RESULT IN SERIOUS INJURY OR DEATH.