


# Delhi Antenna Products

Consumer Antennas & Accessories

## ALL CHANNEL & VHF/FM ANTENNAS



Reinforced plastic stand-off posts.

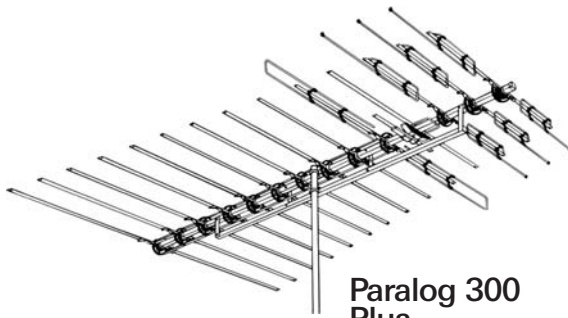


\* Insulators not exactly as shown

**Paralog 300 Plus**  
VHF/FM

### SPECIFICATIONS

MODEL	LENGTH	TURNING RADIUS	VHF LO GAIN (dBd)	VHF HIGH GAIN (dBd)	RANGE	WEIGHT
VIP-302SR	4'8½"	5'2"	4	8	City to Suburban	6 lbs.
VIP-303SR	7'1"	5'11"	5	9	Suburban	8 lbs.
VIP-304SR	9'2"	6'4"	6	10	Suburban & Fringe	9.5 lbs.
VIP-305SR	10'½"	6'10"	6	11	Fringe	13.5 lbs.
VIP-306SR	12'4½"	7'6"	7	12	Deep Fringe	14.5 lbs.
VIP-307SR	16'2"	9'0"	7	13	Deepest Fringe	16.5 lbs.

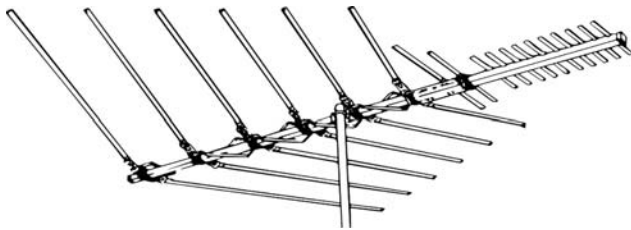


**Super Colour Zoom**  
ALL CHANNEL & VHF/FM

### SPECIFICATIONS

	MODEL	LENGTH	TURNING RADIUS	RANGE	WEIGHT
ALL CHANNEL	ZIP-11	3'11"	4'2"	City	4 lbs.
	ZIP-15	6'5½"	4'0"	Suburban	5.25 lbs.
	ZIP-22	10'1"	6'5"	Fringe	8 lbs.
	ZIP-28(PRO)	11'1"	5'5"	Deep Fringe	10 lbs.
VHF/FM	* ZIP-5V	3'5½"	4'2"	City	4 lbs.
	* ZIP-8V	5'5½"	3'11"	Suburban	5 lbs.
	* ZIP-12V	10'1½"	5'7"	Fringe	8.5 lbs.

### VIP antenna option



#### FM OPTION

All VIP Models come with FM blocking elements which reduce FM up to 12 dB. To receive FM at full gain break off element at score mark. Typical FM rejection response is shown to the left.

### ZIP antenna option

#### VU-8PZ Power Zoom

Optional accessory, extends UHF section of ZIP-28, 22, 15 and 11 by 33.5" to provide additional UHF gain.

